

FERROSTONE®

Premium Steel Wire Solutions

The Backbone of Quality Construction, Agriculture & Security.

Direct Manufacturer Representative in the UK.



Email: sales@ferrostone.co.uk | Website: ferrostone.co.uk

Black Annealed Wire

Standard: BS 4482 / BS EN 10016



Soft, pliable wire for agriculture baling and construction binding.

Parameter	Specification
Diameter	1.60mm - 4.00mm
Tensile	350 - 500 N/mm ²
Coil Weight	20kg - 500kg
Surface	Oiled / Dry

Email: sales@ferrostone.co.uk | Website: ferrostone.co.uk

Galvanized Wire

Standard: BS EN 10244-2



Hot-dipped zinc coated wire offering superior corrosion resistance.

Parameter	Specification
Diameter	1.20mm - 5.00mm
Zinc Coating	40 - 280 g/m ²
Tensile	Soft / High Tensile

Email: sales@ferrostone.co.uk | Website: ferrostone.co.uk

Barbed Wire

Standard: BS EN 10223-1




High-tensile steel wire twisted with sharp barbs.

Parameter	Specification
Type	Iowa / Reverse Twist
Line Wire	1.6mm - 2.5mm
Barb Spacing	100mm (± 10mm)

Email: sales@ferrostone.co.uk | Website: ferrostone.co.uk

Razor Wire

Standard: Reinforced Barbed Tape

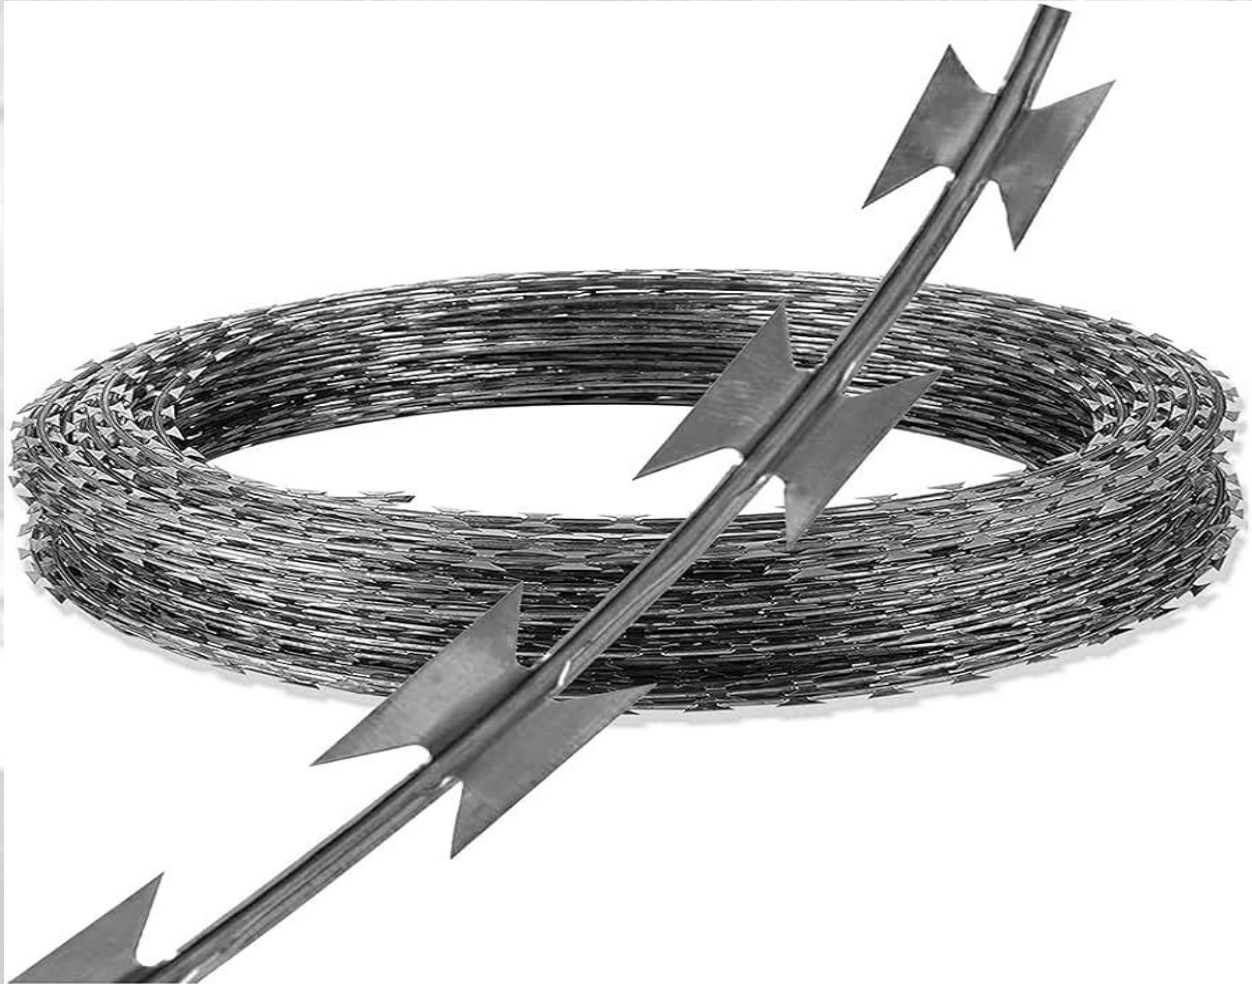

Maximum security concertina coils.

Parameter	Specification
Blade Type	BTO-22, CBT-65
Diameter	450mm - 900mm
Core Wire	High Tensile (2.5mm)

Email: sales@ferrostone.co.uk | Website: ferrostone.co.uk

PVC Coated Wire

Standard: BS EN 10245-2

[



Galvanized core with UV-resistant PVC.

Parameter	Specification
Size (Core/Out)	2.0/3.0mm, 2.5/3.55mm
Coating	UV Resistant PVC
Color	Green (RAL 6005), Black

Email: sales@ferrostone.co.uk | Website: ferrostone.co.uk